

Installation Instructions / Notice de montage



WARNING
ELECTRICAL SHOCK HAZARD

AVERTISSEMENT
RISQUE D'ÉLECTROCUTION

READ and UNDERSTAND these instructions before installing the luminaire.

LISEZ cette notice et assurez-vous de la **COMPRENDRE** avant de monter le luminaire.

EN

Disconnect the Electrical supply power at the services panel (fuse or circuit breaker box). Failure to do so could result in serious injury. Only qualified electricians should install this luminaire and the installation **MUST** conform to the Canadian Electrical Code Part I and any local codes and ordinances. Make sure you have the proper tools and materials to complete the installation before attempting to install the luminaire.

FR

Couper l'alimentation du courant électrique au panneau de service (boîte de fusible ou disjoncteur) sans quoi il pourrait en résulter des blessures sérieuses. Seuls des électriciens qualifiés devraient installer ce luminaire et l'installation doit être conforme au Code Canadien de l'Électricité Première Partie ainsi qu'aux codes et règlements locaux. Assurez-vous d'avoir les outils et le matériel nécessaires à l'installation avant d'essayer d'installer le luminaire.

MONOPOINT MOUNT

1. Connect the quick connectors between cylinder module and mounting kit wires (Fig. 1a detail).
2. Select the desired LED color temperature using the switch inside the cylinder (Fig. 1a detail).
3. Assemble the luminaire by screwing the two parts (Fig. 1a).
4. Remove the Universal Spider Adaptor Plate from the luminaire by unscrewing the two side canopy screws (Fig. 1b).
5. Install the Universal Spider Adaptor Plate on the ceiling recessed junction box by screwing the two screws (Fig. 1c).
6. Make electrical connections between the luminaire and junction box wires as shown in Fig. 1d. Push the wires into the junction box through the central hole of the Universal Spider Adaptor Plate.
7. Install the canopy of luminaire on the ceiling Universal Spider Adaptor Plate by using the two side screws (Fig. 1e).
8. Adjust the luminaire into desired position as shown in Fig. 1f).
9. Apply power.

MONTAGE MONOPOINT

1. Brancher les connecteurs rapides entre les fils du module cylindrique et ceux du kit de montage (Fig. 1a détail).
2. Sélectionner la température de couleur de la DEL choisie à l'aide de l'interrupteur situé à l'intérieur du cylindre (Fig. 1a détail).
3. Assembler le luminaire en vissant les deux parties (Fig. 1a).
4. Retirer la plaque adaptateur à débouchures universelles du luminaire en dévissant les deux vis latérales du pavillon de recouvrement (Fig. 1b).
5. Installer la plaque adaptateur à débouchures universelles sur la boîte de jonction encastrée dans le plafond en vissant les deux vis (Fig. 1c).
6. Effectuer les connexions électriques entre le luminaire et les fils de la boîte de jonction comme indiqué sur la Fig. 1d. Pousser les fils dans la boîte de jonction par le trou central de la plaque adaptateur à débouchures universelles.
7. Installer le pavillon de recouvrement du luminaire sur la plaque adaptateur à débouchures universelles du plafond à l'aide des deux vis latérales (Fig. 1e).
8. Régler le luminaire dans la position désirée (Fig. 1f).
9. Mettre sous tension.

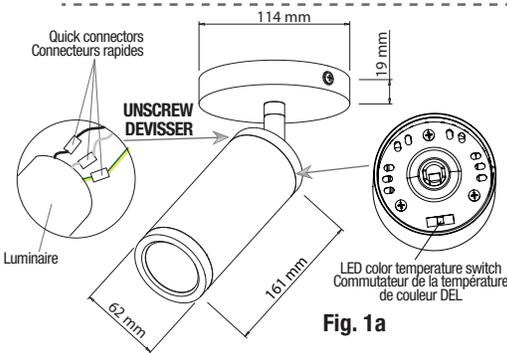


Fig. 1a

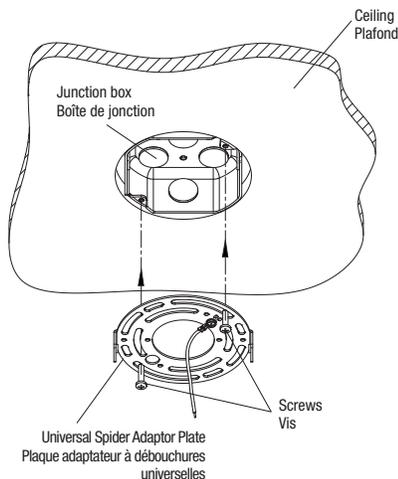


Fig. 1c

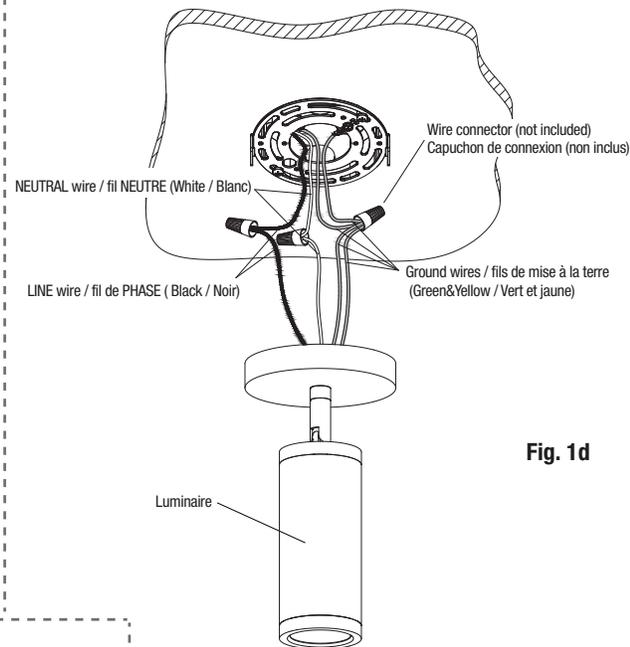


Fig. 1d




Fig. 1b

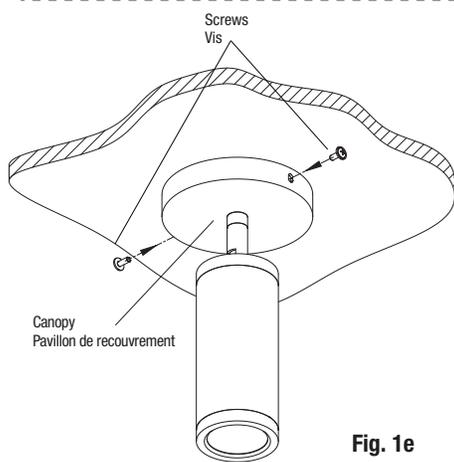


Fig. 1e

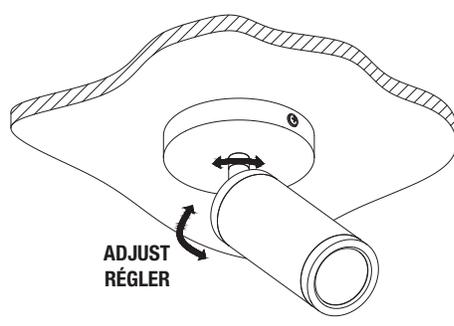


Fig. 1f

ELECTRICAL CONNECTIONS / CONNEXIONS ÉLECTRIQUES

