



WARNING
ELECTRICAL SHOCK HAZARD

AVERTISSEMENT
RISQUE D'ÉLECTROCUTION

READ and UNDERSTAND these instructions before installing luminaire.

LISEZ cette notice et assurez-vous de la COMPRENDRE avant de monter le luminaire.

EN Disconnect the Electrical supply power at the services panel (fuse or circuit breaker box). Failure to do so could result in serious injury.

Only qualified electricians should install this luminaire and the installation **MUST** conform to the Canadian Electrical Code Part I and any local codes and ordinances. Make sure you have the proper tools and materials to complete the installation before attempting to install the luminaire.

FR Couper l'alimentation du courant électrique au panneau de service (boîte de fusible ou disjoncteur) sans quoi il pourrait en résulter des blessures sérieuses.

Seuls des électriciens qualifiés devraient installer ce luminaire et l'installation doit être conforme au Code Canadien de l'Électricité Première Partie ainsi qu'au codes et règlements locaux. Assurez-vous d'avoir les outils et le matériel nécessaires à l'installation avant d'essayer d'installer le luminaire.

Disconnect all power to the wiring intended to be connected to the luminaire. Ensure that the ambient temperatures are within the luminaire's rated limits. Check the nameplate's marking for more information.

INSTALLATION

1. Install safely the luminaires on the required surface.
 2. Install individually each luminaire of the system.
- NOTE:** Install maximum five (5) luminaire series.
3. Make electrical connections between luminaires, using the female - male plugs (Fig. 1, 2).
 4. Connect the terminal male plug to the power supply (Fig. 1).
 5. Apply power.

Couper l'alimentation du circuit où le luminaire sera raccordé. S'assurer que les températures ambiantes soient à l'intérieur des conditions nominales du luminaire. Vérifier la plaque signalétique pour plus d'informations.

INSTALLATION

1. Installer de façon sécuritaire les luminaires sur la surface requise.
 2. Installer chaque section du système individuellement.
- NOTE:** Installer maximum cinq (5) luminaires en série.
3. Effectuer les connexions électriques entre les appareils, en utilisant les prises femelle - mâles (Fig. 1, 2).
 4. Branchez la prise mâle terminale dans la prise d'alimentation électrique (Fig. 1).
 5. Mettre sous tension.




Fig. 1

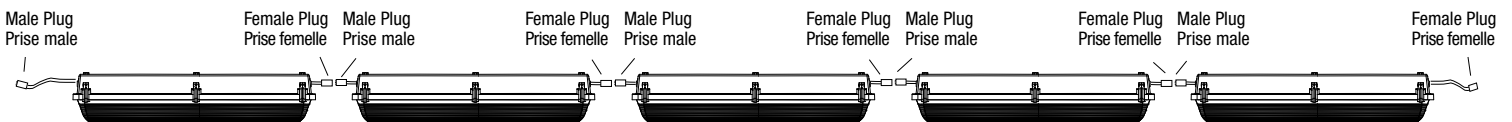


Fig. 2